

CV-34/DC/SF lock release



Reference: CV-34P/DC/SF
Product code: 20600353
EAN code: 8422463171103



Main characteristics

- **Standard reversed operation**, the door lock release is locked while the power is on. When the power is off, the latch is unlocked automatically, allowing the door to open.
- **Without shield.**
- Casing manufactured in 2mm. thick pressure injected light alloy, with a height of 90mm.
- Adjustable bolt on all models, allowing 3 mm. precision.
- Operation voltage from 8 to **12V d.c.** (300mA consumption).



More information

Mechanical operating mode:

The lock release is closed while the coil is active (powered).

As soon as the electric lock is not supplied with tension, the latch is unlocked automatically, allowing the door to open.

■ Dimensions:

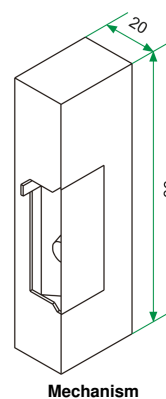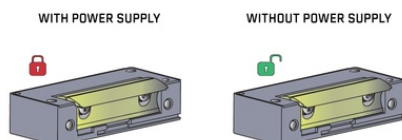

Accessories

- G/INOX shield
- S/INOX shield
- SU surface shield
- G shield
- GC short shield

Visit in the website: <https://www.golmar.es/products/cv-34p-dc-sf>

Visit in the website: <https://www.golmar.es/products/cv-34p-dc-sf>