


NX7101/A/G+ Adapter frame with grille module



Reference: NX7101/A/G+
Product code: 11777101
EAN code: 8429898025131

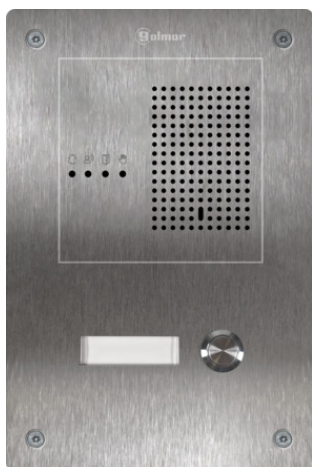

Main characteristics

- Adapter frame with grille module and a pushbutton for the installation of vandal-proof intercom stations with informative LEDS for the visual impairment people.
- Contains the EL632/G+/48 IP DUAL POE module.
- Necessary the CE-7600 embedding box or the 7600 INOX surface box.

Dimensions: 155(H) x 235(W) x 2,5(P) mm.

More information

Specifications	
Type of device	Pushbuttons
Mounting	Surface,Embedded
Audio of communication	hands-free
Call type	Individual call,Group call
Push button	Simple
Vocal messages	Yes
Available languages	English,Spanish,Portuguese
Speaker power (W)	2
Integrated camera	No
Compatibility	ONVIF,Golmar,VoIP SIP
Remote Access / App	App G2Call +
Operation	Mechanical Push Button
Number of buttons	1
I / O audio	Microphone,Speaker
Inductive loop	No
Guidance LEDs	Yes
Log of calls	Yes
Management software	Yes
Programming	Computer
HW platform	Linux
Protocols	TCP/IP
Input voltage (V)	12Vcc,PoE,18Vcc
Rest consumption (W)	2.8
Max. consumption (W)	5.8
Installation	UTP
Max. (M)	100
Technology	IP G +
Functions	Call to concierge,RTSP streaming
Number of door release relays	2
Microphone sensitivity (DB)	105
Relative humidity work (max.)	90
Relative humidity Work (min.)	10
Maximum working temperature (°C)	60
Minimum working temperature (°C)	-20
Dimensions - Width (mm)	155
Dimensions - High (mm)	235
Dimensions - Deep (mm)	56

Visit in the website: <https://www.golmar.es/products/nx7101-a-g-plus>

Accessories

- CE-7600 embedding box

Visit in the website: <https://www.golmar.es/products/nx7101-a-g-plus>